


EXPOSED FASTENING SYSTEM



The Retro-R® Panel is an excellent choice for retrofit construction, and can be applied directly over an existing PBR or R panel to give your building a new look and longer life. This exposed fastener system has a Drip Stop membrane on the back side to prevent rust transferring from the old roof to the Retro-R panel.

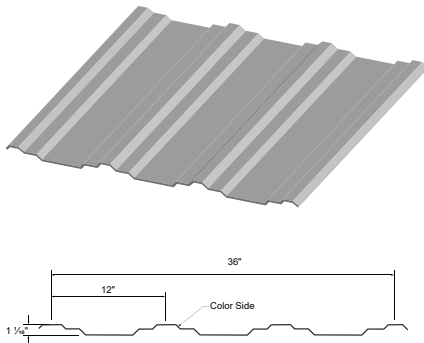

PRODUCT SPECIFICATIONS

Applications: Roof and Wall

Coverage Widths: 36"

Rib Spacing: 12" on center

Rib Height: 1 1/16"

Minimum Slope: 1/2:12

Panel Attachment: Exposed Fastening System

Gauges: 29 (standard); 26

Finishes: Smooth (standard)

Coatings: Galvalume® Plus, Signature® 200

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
ENVIRONMENTAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
ROOF LISTINGS	Roof Performance - Florida Approval	ASTM E 1592	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	See FL# 42382.17

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, American Building Components reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. To ensure you have the latest information available, please inquire or visit our website: abcmetalroofing.com.

© 2025 American Building Components, part of **Cornerstone Building Brands**, Inc. ALL RIGHTS RESERVED. 0805219991126/RevD/MS/0825