


EXPOSED FASTENING SYSTEM



Ameri-Drain® panel offers excellent water shedding for residential, light commercial, agricultural, and storage buildings. Suitable for both roof and wall applications, Ameri-Drain® panels must be installed over a solid waterproofed deck when used as a roof system.

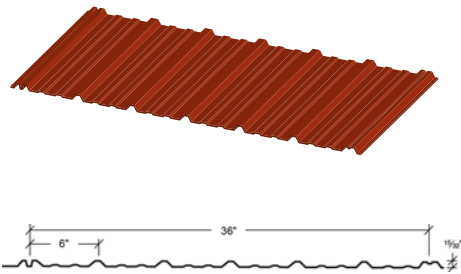

PRODUCT SPECIFICATIONS

Applications: Roof and Wall

Coverage Widths: 36"

Rib Spacing: 6" on center

Rib Height: 1⁵/₃₂"

Minimum Slope: 3:12

Panel Attachment: Exposed Fastening System

Gauges: 29 (standard); 26 (optional)

Finishes: Smooth (standard)

Coatings: Galvalume® Plus, Signature® 200

| CATEGORY | CHARACTERISTIC | TEST METHOD | PURPOSE | RESULT |
|------------------------|-----------------------|-------------|---|---|
| ENVIRONMENTAL | Impact Resistance | UL 2218 | Determines Impact Resistance of prepared Roof Covering Materials | Class 4 Rating |
| FIRE RESISTANCE | Room Fire Performance | UL 790 | Standard for Standard Test Methods for Fire Tests of Roof Coverings | See Class A Fire Rating Data Sheet |
| STRUCTURAL | Negative Wind Loads | AISI S100 | North American Specification for the Design of Cold-Formed Steel Structural Members | See Section Properties and Allowable Load Table Section |
| | Gravity Loads | AISI S100 | North American Specification for the Design of Cold-Formed Steel Structural Members | See Section Properties and Allowable Load Table Section |

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, American Building Components reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. To ensure you have the latest information available, please inquire or visit our website at abcmetalroofing.com.

© 2025 American Building Components, part of **Cornerstone Building Brands**, Inc. ALL RIGHTS RESERVED. 0811239991108/RevC/MS/0325